

Geophysical Research Letters[®]

RESEARCH LETTER

10.1029/2024GL110650

Key Points:

- Numerical simulations and linear and nonlinear theoretical analyses feature how the river planimetry evolves under variable flows
- Unsteady water flows slow down the planimetric evolution of river meanders compared to constant discharges
- Flow variability is crucial for meander dynamics on yearly to decadal timescales, with implications for river engineering and restoration

Supporting Information:

Supporting Information may be found in the online version of this article.

Correspondence to:

F. Bassani,
francesca.bassani@epfl.ch

Citation:

Bassani, F., Bertagni, M. B., Ridolfi, L., & Camporeale, C. (2024). Unexpected transient dynamics of meandering rivers with unsteady flows. *Geophysical Research Letters*, 51, e2024GL110650. <https://doi.org/10.1029/2024GL110650>

Received 13 JUN 2024

Accepted 12 OCT 2024

Author Contributions:

Conceptualization: Francesca Bassani, Luca Ridolfi, Carlo Camporeale
Data curation: Francesca Bassani
Formal analysis: Francesca Bassani, Matteo B. Bertagni
Investigation: Francesca Bassani, Matteo B. Bertagni, Carlo Camporeale
Methodology: Francesca Bassani, Matteo B. Bertagni, Carlo Camporeale
Project administration: Carlo Camporeale
Software: Carlo Camporeale
Supervision: Carlo Camporeale
Validation: Francesca Bassani
Visualization: Francesca Bassani, Matteo B. Bertagni

© 2024. The Author(s).

This is an open access article under the terms of the [Creative Commons Attribution-NonCommercial-NoDerivs License](#), which permits use and distribution in any medium, provided the original work is properly cited, the use is non-commercial and no modifications or adaptations are made.

Unexpected Transient Dynamics of Meandering Rivers With Unsteady Flows

Francesca Bassani^{1,2} , Matteo B. Bertagni^{2,3,4} , Luca Ridolfi² , and Carlo Camporeale² 

¹Laboratory of Catchment Hydrology and Geomorphology, École Polytechnique Fédérale de Lausanne, Sion, Switzerland,

²Department of Environment, Land and Infrastructure Engineering, Politecnico di Torino, Torino, Italy, ³The High Meadows Environmental Institute, Princeton University, Princeton, NJ, USA, ⁴Department of Civil and Environmental Engineering, Princeton University, Princeton, NJ, USA

Abstract River meandering dynamics are here explored in light of unsteady water flows. While mathematical models have usually focused on constant discharges—a reasonable and widely adopted approach for long-term considerations—we show that varying flows strongly affect the short-term planimetric evolution of meanders, before the cutoff occurrence. In particular, flow variability slows down the meanders' dynamics while does not significantly influence the wavelength selection. We support our arguments with numerical simulations and theoretical (linear and nonlinear) analyses, showing that an interplay between out-of-phase river geometry and flow is responsible for the meander-dynamics slowdown. Our results suggest that accounting for flow variability is critical in assessing yearly to decadal meander dynamics with important implications for river engineering and management strategies.

Plain Language Summary Meandering rivers are natural sinuous channels shaping the Earth's surface with their lateral migration motion. Beyond theoretical interest, the investigation of such dynamics is fundamental for river management and restoration. A common way to study river meander dynamics is through numerical simulations that simulate the planform evolution of the river geometry in space and time. A classic assumption in these simulations is a constant water flow. In this study, we show that considering more realistic temporally varying flow discharges slows down the meander growth compared to the case with a constant flow discharge.

1. Introduction

The fascinating dynamics of meandering rivers have been widely investigated during the past decades, not only because of their intrinsic beauty and frequent occurrence in nature but also for their key role in river engineering, management, and restoration (Buijse et al., 2002; Jansen et al., 1979; Ollero, 2010). Typically, morphodynamic models have represented a powerful tool to address and describe the physical mechanisms underlying the meandering dynamics (Camporeale et al., 2007), that is, how the interplay of water flow, sediment load, channel planform, and bed morphology determine the fluvial spatio-temporal evolution. Enhanced by the cooperative advances in geomorphology and fluid dynamics (Seminara, 2006), robust analytical frameworks for flow field and bed topography have been developed (Duan & Julien, 2005; Eke et al., 2014; Ikeda et al., 1981; Imran et al., 1999; Johannesson & Parker, 1989; Parker et al., 2011; Zolezzi & Seminara, 2001). Despite the different mathematical formulations and hypotheses distinguishing these models, a constant water discharge is usually assumed for the flow field. This assumption of a steady component of the forcing, which is also referred to as 'formative' discharge (Inglis, 1949), is grounded in the tenet that a single, dominant flow (arguably related to its sediment transport capability) may determine river channel morphology (quasi-steady morphodynamics, e.g., Pittaluga & Seminara, 2011). In fact, statistical properties of the reach planimetry mainly depend on the dominant flow and fluctuate without changing relevantly with respect to dominant flow-induced morphology (Howard & Hemberger, 1991). Determining whether the equilibrium state under steady forcing is representative of river dynamics, especially at different evolution periods, remains unresolved.

Actually, rivers are far from being steady forced systems: they experience stochastic flows due to the natural fluctuations of the hydrologic forcing. Studies on river eco-morphodynamics have shown that different hydrologic regimes strongly affect the formation and suppression of alternate bars (Carlin et al., 2021; Eekhout et al., 2013; Hall, 2004; Tubino, 1991; Welford, 1994) and the growth of riparian vegetation (Bertagni et al., 2018; Vesipa et al., 2017). Only a few notable studies have explored the impact of stochastic flows on river planar geometry.

Writing – original draft:

Francesca Bassani

Writing – review & editing:

Francesca Bassani, Matteo B. Bertagni,
Luca Ridolfi, Carlo Camporeale

Pittaluga and Seminara (2011) found that different peak discharges affect the river bed scour and deposit. The study highlighted that differences in bed elevation emerge at short-term timescales under varying flow, but concluded that repeated flood sequences (a proxy for unsteadiness) result in a dynamic equilibrium of the system in the long term. The model of Asahi et al. (2013) further demonstrated that flow unsteadiness affects the river planform shape (e.g., width and sinuosity), and bank erosional and depositional processes in meandering rivers. However, a more in-depth understanding of the meandering dynamics under varying flows—from both the riparian geomorphology and hydraulic geometry perspectives—is still missing. Particular attention is also required in light of the extreme events that rivers will increasingly be exposed to (Eccles et al., 2019; François et al., 2019).

Previous works have addressed the problem of variable discharges by accounting for a set of flows that occur intermittently over time (Paola et al., 1992; Parker et al., 1998). Here, we go beyond such simplification by directly considering the probabilistic distribution of unsteady flows to explore their effects on meandering river dynamics. In particular, we focus on the stream planform evolution at short-term timescales, defined as periods shorter than the typical timescale for cutoff occurrence (*sensu* Camporeale et al., 2005). Short-term dynamics are of interest because (a) they can reveal better insights into the meander geometry evolution, without being compromised by the filtering action on geometric nonlinearities induced by cutoff events (Camporeale et al., 2008; Perucca et al., 2005), and (b) they are crucial for engineering purposes and restoration practices given their yearly to decadal timescales (e.g., Ciotti et al., 2021; Gilvear, 1999). To assess the impact of flow variability, we perform short-term numerical simulations of meandering rivers with two models of different complexity, using parameters typical of realistic meandering rivers in nature. By comparing the morphodynamic evolution resulting from constant and unsteady flows, we find that flow variability slows down the planar evolution of the meanders and impacts the meander wavelength. We also perform analytical linear and nonlinear analyses to physically explain the reasons behind such behavior. Our work highlights short-term features that did not emerge in previous constant-discharge analyses and should be considered when developing river engineering and restoration plans.

2. Observations From Short-Term Numerical Simulations

We explore the effects of flow variability on river meander dynamics through a physically based numerical approach. Specifically, we use the seminal model for the river centerline evolution, originally proposed by Hasegawa (1977) and Ikeda et al. (1981) and here referred to as the HIPS model following Parker et al. (2011). Although this model does not account for the riverbed morphodynamics, it has been widely employed in the literature for its conceptual simplicity, robustness, and capability of reproducing the key elements of meandering dynamics: (a) wavelength selection; (b) downstream meander migration; (c) meander elongation; and (d) upstream skewness of meanders (Camporeale et al., 2007). These features allow us to catch the essentials enclosed in the physical interpretation of the phenomena occurring when unsteady discharges are considered. We confirmed our findings by comparing them with a more refined physically based model (Zolezzi & Seminara, 2001), as discussed and shown in the Supporting Information S1.

The HIPS model is rooted in a linearized treatment of the shallow water equations, and its main assumption is that the bank erosion rate, V , is proportional to the excess velocity at the river banks, u_b , through an erodibility coefficient E (Parker & Andrews, 1986). The excess bank velocity $u_b(s)$ —where s is the curvilinear abscissa of the river centerline—is the local and linear perturbation of the depth-averaged velocity at the banks with respect to the uniform solution. After some algebra (Edwards & Smith, 2002), the main model outcome $V(s)$ parametrically depends on a spatial scale D , a temporal scale T and a pure number P (called the Parker number after Edwards and Smith (2002)) that respectively read

$$D = \frac{H}{2C_f}, \quad T = \frac{D^2}{bEU}, \quad P = \frac{F^2 + A}{2}, \quad (1)$$

where H and U are the reach-averaged depth and velocity, C_f is the friction coefficient (dependent on sediment roughness and depth), b is the channel half-width, F is the Froude number, and A is an empirical slope factor (Text S1, Supporting Information S1). Some remarks are in order: (a) the scale D emerges from shallow water equations and is the characteristic length scale of the backwater curve in open channel flows; (b) the timescale T is related to the bank erosion, so it is of the order of years or longer; (c) due to the meander elongation, the planform sinuosity S

changes in time and, consequently, so do the length and time scales according to $D = D_0 S^{1/3}$ and $T = T_0 S$, where D_0 and T_0 correspond to $S = 1$ (i.e., straight channel conditions, henceforth referred to with subscript zero); and (d) when dealing with unsteady flows, we also consider the change in the reach-averaged depth and velocity. To simplify the analysis, we instead assume the width to remain constant according to an idealized rectangular section.

The simulations are performed for three gravel-bed rivers with morphodynamic parameters representing real meandering rivers in the most likely sub-resonant regime (Seminara et al., 2024; Zolezzi et al., 2009)—that is, width-to-depth ratio not too large, see Zolezzi and Seminara (2001); Seminara (2006); Gautier et al. (2007)—and increasing formative flow (hence, increasing length scale D_0 —see Table S1 in Supporting Information S1). The choice of the parameters fulfills literature formulas for hydraulic geometry under uniform flow conditions (Parker et al., 2007) (details are reported in Text S2, Supporting Information S1).

For each river, three configurations characterized by the same morphodynamic parameters but different flow conditions are explored. The first one adopts a steady (constant) discharge Q_{st} that induces the lateral migration of the river and corresponds to the one defining the river geometry (Text S2, Supporting Information S1). The other two configurations involve a variable flow Q_{unst} in which the stream velocity and depth are updated following the varying discharge at every timestep of the evolution, thus affecting also the sinuosity-dependent length and time scales governing the meandering dynamics (D and T , see Text S1, Supporting Information S1). The variability is simulated by randomly extracting a discharge value at any time step $Q(t)$ from a Gamma-shaped flood hydrograph. The rationale is that, when simulating discharge time series through a stochastic process resembling a random flood hydrograph with a Compound Poisson Process (CPP), the probability density function (PDF) results Gamma-distributed and this has shown to be a parsimonious and robust strategy in fluvial hydrology (Ridolfi et al., 2011). Although the CPP is a correlated process, the natural time correlation of discharge (order of months) is much shorter than the morphodynamic timescale of river meandering (order of decades/centuries), so some preliminary tests revealed that the temporal autocorrelation has no significant effects. For this reason, we here adopt only uncorrelated Gamma-distributed signals. In particular, at every timestep we extract a discharge that induces a lateral migration (i.e., Shield stress greater than its critical value)—thus overcoming the time-rescaling issue arising in other approaches, for example, the intermittency factor (Paola et al., 1992).

For the sake of comparison, we consider the mean of the variable-flow PDF equal to the discharge of the steady state, Q_{st} . The PDF variance, which is a proxy for flow unsteadiness, can be varied by adjusting the coefficient of variation while maintaining the same mean value. For each parametric setting (i.e., fluvial scenario), the following three cases are compared: $C_v = 0$ (steady flow Q_{st}), $C_v = 0.4$ and $C_v = 0.75$ (unsteady flows Q_{unst}). In the figures, these scenarios are reported with solid, dashed, and dotted lines, respectively.

Figure 1a shows the temporal evolution of the reach-averaged dimensionless curvilinear wavelengths λ_c , that is, twice the curvilinear distance between inflection points of the centerline (zero curvature). For comparison purposes, the wavelengths and times have been non-dimensionalized with the characteristic scales D_0 and T_0 . The temporal behavior of λ_c highlights a first remarkable and counter-intuitive result: discharge variability slows down the meander growth (i.e., the same λ_c values are reached at longer times) with respect to the case of constant discharge. We identify four characteristic phases (colored shaded background in Figure 1a). In the beginning, when the wavelength has not yet been selected because the noise in the planimetry has just started to trigger the instability, all simulations are aligned, and the sinuosity is $S \simeq 1$ (phase 1). Then, the river starts selecting its typical wavelength, and the sinuosity slightly increases, resulting in an enhanced mean curvilinear wavelength (phase 2). In this phase, namely at $t/T_0 = 1-5$, the differences among the simulations are negligible. This phase is still characterized by linear processes with only weak perturbations to the planimetric evolution of the rivers (the average sinuosity for all the cases is still around $S \simeq 1.001$; see also planimetry A in Figure 1c). In this linear phase, flow variability yields the same mean meander wavelength as constant discharge (corresponding to the mean discharge of the unsteady case). The third phase, associated with the meander growth, completely changes the game. The discrepancy between the steady and unsteady cases bursts out as the meanders grow in both the curvilinear wavelength and sinuosity. The delayed evolution of the meanders forced by Q_{unst} is clear, and the time lag between the two cases accumulates the more the nonlinearities drive the curve growth dynamics in this phase. Finally, the fourth phase is dominated by the occurrence of cutoff events, a strongly nonlinear process by definition. They produce a saturation in the growth of the meanders and a long-term filtering action, resetting the system's memory (Camporeale et al., 2008). Note that we have slightly overlapped the regions characterizing phases 3 and 4 due to the different time scales of the three rivers.

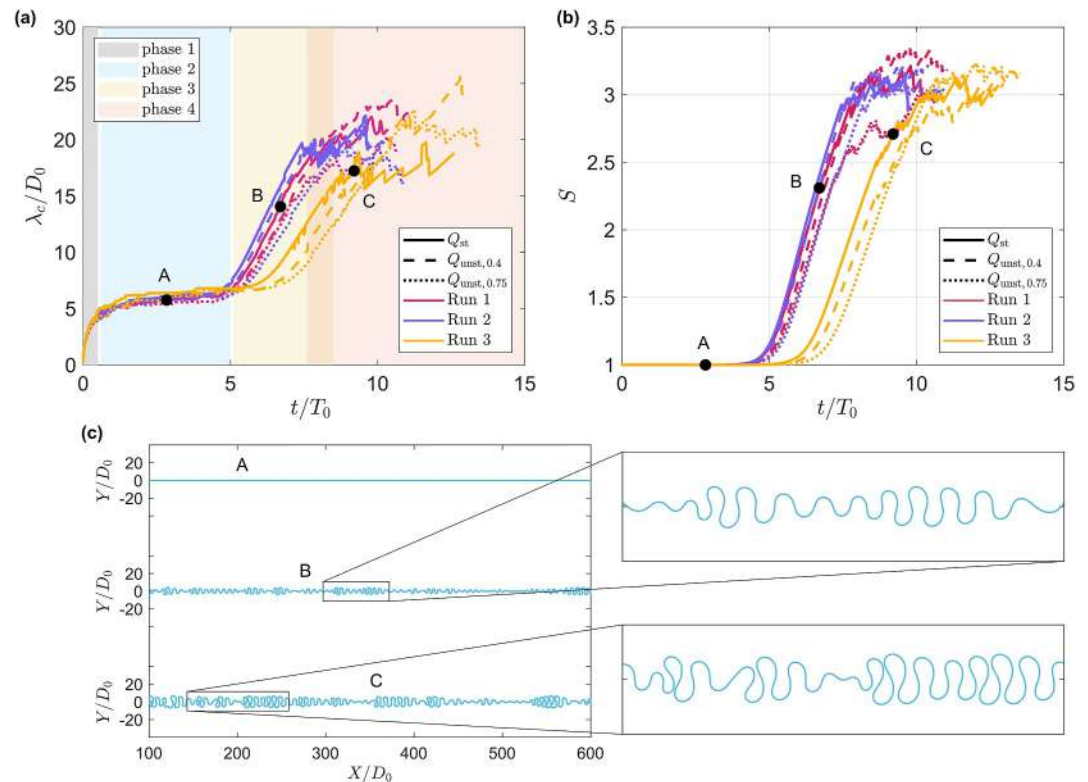


Figure 1. Impact of flow unsteadiness on simulated meander growth. Time series of (a) the dimensionless reach-averaged curvilinear meander wavelength λ_c/D_0 and (b) the river sinuosity S . The colors code the three simulated rivers set (Table S1, Supporting Information S1), while line styles indicate flow conditions: solid for steady discharge Q_{st} , dashed and dotted for varying discharges (Q_{unst}) with coefficients of variation of 0.4 and 0.75, respectively. The shaded areas in panel (a) qualitatively highlight the four phases described in Sect. 2, with a focus on the corresponding river planimetries (black dots) reported in panel (c).

The behavior of λ_c is mirrored in the river sinuosity S , that is, the ratio between the curvilinear length and the linear distance between its endpoints (Figure 1b). The temporal evolution of S confirms that the discharge variability slows down the meandering growth. In each Run, the sinuosity of the constant flow simulation starts growing earlier than that of Q_{unst} . Namely, the meander bends develop faster without discharge fluctuations. The first sinuosity drops due to cutoff events, which put an end to the simulations, are also delayed when flow unsteadiness occurs. Notice that the delay in morphological dynamics induced by flow unsteadiness is greater the larger the coefficient of variation, C_v , so confirming that the shift in the meander growth is linked to the variability itself.

3. Mathematical Analysis and Interpretation

Three key features have emerged from the above numerical simulations: (a) flow variability does not significantly affect the wavelength selection during the first (linear) phases (1 and 2) of the meandering dynamics, (b) different wavelengths appear over medium-long times (phases 3 and 4), and (c) discharge fluctuations induce a meander-growth slowdown that is evident throughout the dynamics. Here, we provide explanations and insights into these results by physically based analyses. Specifically, the linear component of meandering dynamics helps to understand the initial meander-growth phases, while nonlinear components are critical during later stages.

3.1. Linear Dynamics

A long tradition of modeling has shown that the inception of river meandering is nicely described by analytically manageable linear approaches (Camporeale et al., 2007). At the initial stages of the dynamics, when the river sinuosity is still very low, a classical linear stability analysis of the evolution equation of a simple harmonic planform provides the so-called dispersion relationship, relating the temporal growth rate σ , the wavelength λ and

some relevant governing parameters (e.g., for the HIPS model the parameters listed in Equation 1, see also Supporting Information S1, Text S1). By focusing on the role of the water depth H —that is, the fluctuating forcing of the present problem, being H dependent on Q —the dispersion relationship has a general form $\sigma = \sigma(\lambda, H)$. A contour plot of σ , for the model HIPS, is reported in Figure 2a, and it is crucial to understand phases 1 and 2 of the numerical simulations. The figure also reports the fastest-growing mode (black line) associated with any flow depth, namely the value λ_s such as $\sigma(\lambda_s)$ is maximum for a given depth. Notably, for a given planimetric configuration (fixed value of λ), the meander growth rate in the proximity of the fastest-growing mode decreases with higher flow depth values. Namely, higher flows slow down the meander growth and can even reverse it (gray region of Figure 2a). The physical reason is that, when the depth increases, the lateral super-elevation of the free surface increases, with a damping effect on secondary currents and bed shoaling at the outer bank, so reducing lateral bank erosion.

A crucial aspect is the quasi-linear dependence of the fastest-growing mode on the flow depth. Since the dynamics are linear (thus, the superposition principle is valid), the nearly straight shape of the plot $\lambda_s = \lambda_s(H)$ implies that the average wavelength, forced by random water depths (PDF $p(H)$ shown in Figure 2b), is close to the wavelength corresponding to the mean depth $\bar{H}$. In fact, the probability-weighted (linear) growth rate $\bar{\sigma}(\lambda) = \int \sigma(\lambda, H)p(H)dH$ peaks nearly at the same wavelength selected in the steady deterministic case with $H = \bar{H}$ (Figure 2c). This explains why in the simulations, as long as the dynamics are linear (i.e., phases 1 and 2), rivers exhibit the same typical wavelength regardless of depth fluctuations, being the (constant) water depth of the deterministic case equal to the mean of the Gamma-distributed temporal series ($\bar{H}$).

A second and more subtle aspect emerges. Each water depth tends to select the wavelength λ_s performing the maximum growth. For example, in the constant flow case ($H = \bar{H} = 3$ m in Figure 2a), the selected wavelength is around $\lambda_{s|H=3} = 1900$ m, and the typical time scale is $\tau = 2\pi/\sigma \sim 120$ years. However, in the varying flow case depths change over time and the linear wavelength selection mechanism adjusts continuously. The two red paths reported in Figure 2a provide possible scenarios. The path from point A to C describes an increase in water depth (H from 3 to 4 m), with two consequences on the system: (a) a first rapid response (A→B) induced by the new water current ($H = 4$ m) flowing in the planimetry and having wavelength $\lambda_{s|H=3}$ selected by $H = 3$ m. This results in a reduction of the growth rate σ , that changes from $\sigma(\lambda_{s|H=3}, H = 3) = 0.05$ to $\sigma(\lambda_{s|H=3}, H = 4) = 0.02$; (b) a second slow response (B→C), that is the wavelength selection adjustment which gradually brings the wavelength to the new value of $\lambda_{s|H=4} \simeq 2800$ m (on the black line) and to the growth rate $\sigma(\lambda_{s|H=4}, H = 4) = 0.02$. This path A–B–C therefore implies a slowdown of growth. Differently, reducing the water depth from 3 to 2 m (path A–B'–C') performs an opposite picture: both rapid and slow responses entail a greater growth rate compared to the starting condition with $H = 3$ m. The key point explaining the overall slowdown of meandering dynamics observed in the simulations is that a large region of the domain exhibits low or negative growth rates. Therefore, a 'slowdown effect' seems generally to prevail when discharge fluctuations induce H to move over the entire domain.

A definitive proof of such a prevalence is provided by the computation of the probability-weighted function $\bar{\sigma}(\lambda) = \int \sigma(\lambda, H)p(H)dH$ where, for a given value of λ , the growth rate is weighted with the PDF of the depth (see yellow line in Figure 2c). It clearly emerges that this function is sensibly lower than the growth rate computed with the average depth (i.e., $\sigma(\lambda, H = \bar{H})$, blue line in Figure 2c). In particular, both functions peak at almost the same wavelength, but the peak value of the former is about 30% smaller than the latter. Finally, notice that the same slowdown effect occurs if other (realistic) water depth PDFs (e.g., exponential, log-normal) or more advanced meandering models (e.g., by Zolezzi and Seminara (2001)) are taken into account. It follows that the stochasticity-induced delay with respect to the constant-discharge case is not model-specific, but it is peculiar to the meandering dynamics.

3.2. Nonlinear Dynamics

Geometrical nonlinear effects come into play as the river plan evolves and the meanders grow in sinuosity. To understand the role of the (geometric) nonlinearities in the slowdown effect under unsteady conditions, we consider a realistic prototype of channel planimetry, known as Kinoshita's curve (Parker & Andrews, 1986). The curve representation is based on the local tangent angle with respect to the downslope direction, given in terms of the curvilinear coordinate s , as in

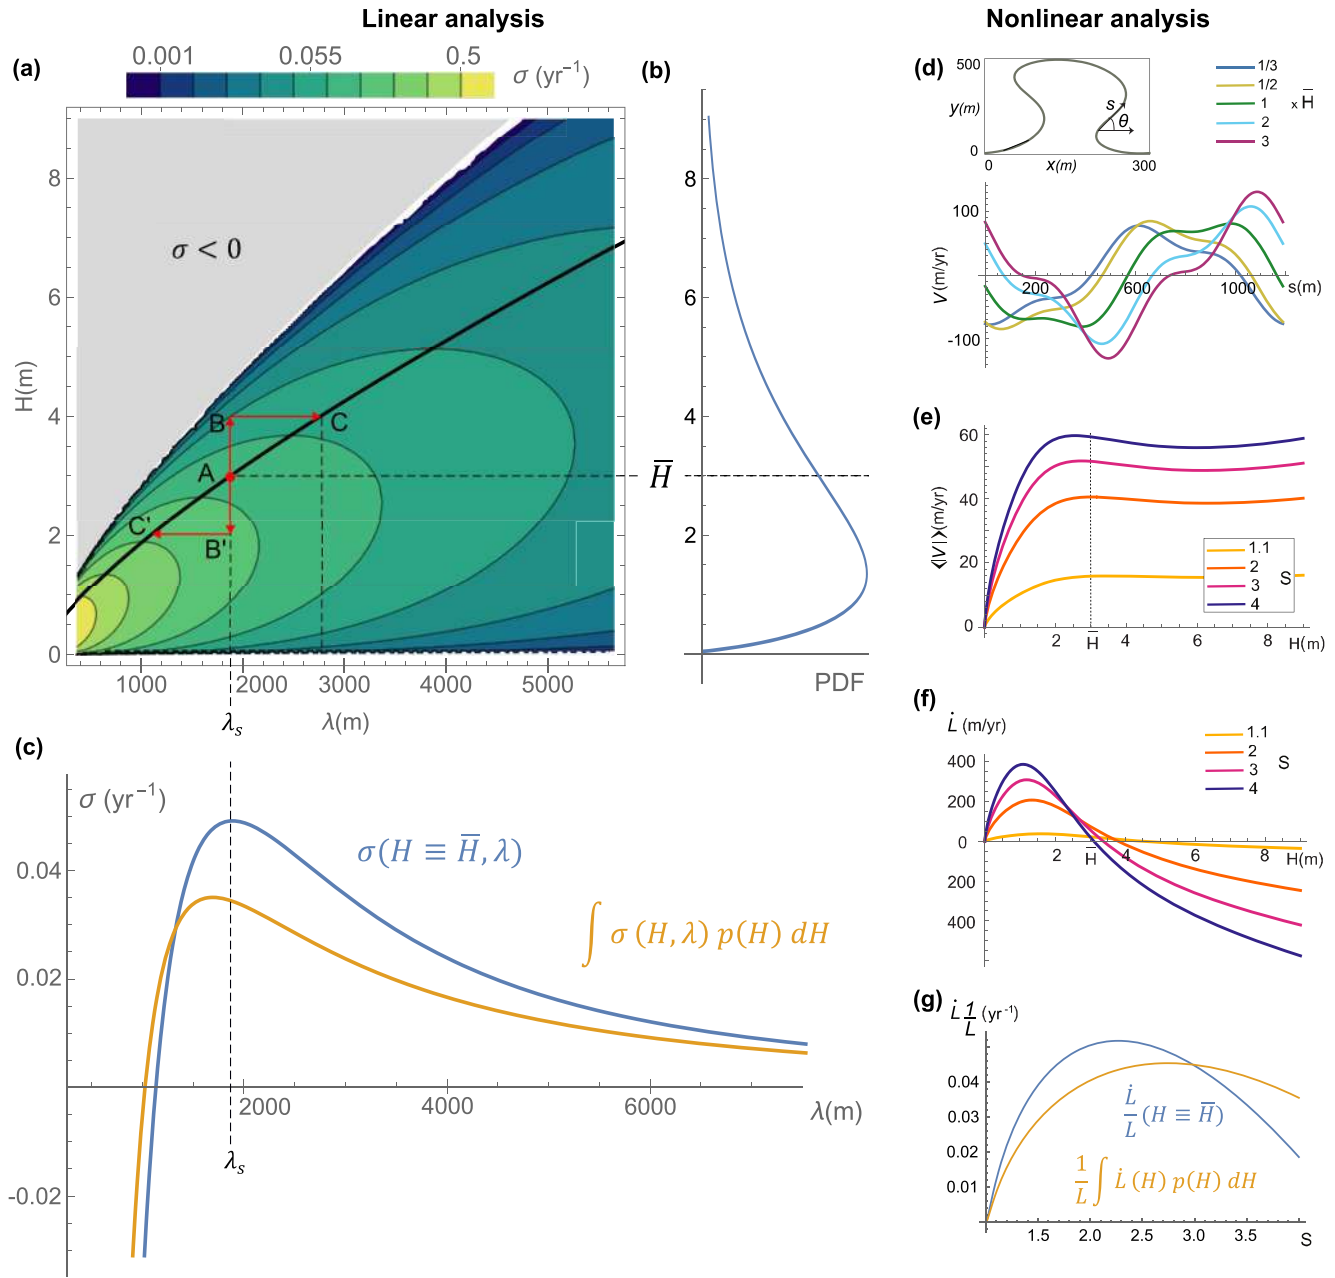


Figure 2. Linear (a)–(c) and nonlinear (d)–(g) analyses. (a) Contour plot of the linear growth rate σ as a function of the meander wavelength (λ) and flow depth (H). The solid black line marks the fastest-growing wavelength for any given water depth, while red arrows indicate the paths A–B–C and A'–B'–C' (details in the main text). (b) Example of PDF for the water depth ($C_v = 0.75$). The average flow depth ($\bar{H} = 3$ m) equals the flow depth in the deterministic case with constant flow. (c) Growth rate versus wavelength for the constant flow depth (blue line) and probability-weighted growth rate $\int \sigma(H, \lambda) p(H) dH$ for the varying flow case (yellow line). The vertical dashed line highlights the maximum growth rate selecting the emerging wavelength λ_s in the deterministic case. Note how the maximum growth rate in the varying flow case is much lower. (d) Local migration rate V along the meander for various flow depths as fractions or multiples of the time-averaged formative flow ($\bar{H}$). The box at the top shows the meander geometry obtained with the Kinoshita curve (Equation 2) for $S = 4$. (e) Wavelength-averaged migration rate $\langle V \rangle$, and (f) length change rate $\dot{L}$, as a function of the flow depth and for different meander sinuosities S . (g) Relative meander length change rates $\dot{L}/L$ for the average depth $\bar{H}$ (blue line) and integrated over the PDF of H (yellow line) as functions of the sinuosity S . In all the panels, the river parameters are: $b = 27$ m, $d_{50} = 0.03$ m, $E = 10^6$, and slope $J = 0.43\%$.

$$\theta(s) = \epsilon \sin(qs) + \frac{\epsilon^3}{64} \left[\sqrt{P} + \cos(3qs) + \frac{1}{3} \sin(3qs) \right], \quad (2)$$

where ϵ is the meander amplitude, related to sinuosity through the polynomial $S^4 = 1 - \epsilon^2/4 + \epsilon^4/64 - \epsilon^6/2304$ (Edwards & Smith, 2002), and $q = 2\pi/\lambda$ is the curvilinear wavenumber. By introducing Equation 2 in the HIPS model (see Equation 3 in Supporting Information S1, Text S1) and assuming periodic boundary conditions, $V(s) = V(s + 2\pi/q)$, one obtains the migration velocity along the meander

$$V(s) = \alpha_5 U [\alpha_1 \cos(qs) + \alpha_2 \cos(3qs) + \alpha_3 \sin(qs) + \alpha_4 \sin(3qs)], \quad (3)$$

where the coefficients α_i are reported in Text 3 of Supporting Information.

Figure 2d shows the migration rate $V(s)$ for a Kinoshita-meander planimetry characterized by a relatively high sinuosity ($S = 4$) for different water depths. Two important nontrivial features emerge: (a) the structure of the function $V = V(s)$ is highly dependent on the flow characteristics, with peaks occurring at different points along the meander, depending on the water depth; (b) although the peak values of $V(s)$ can increase with depth, this is not generally true for large portions of the meander, where migration rates not ordered according to the water flow are observed.

The response of the meander migration rate to different flow rates has very interesting consequences for both the wavelength-averaged migration rate, $\langle |V| \rangle = (q/2\pi) \int_0^{2\pi/q} |V| ds$, and the rate of meander length change, $\dot{L} = \int_0^{2\pi/q} V(d\theta/ds) ds$ (see Text S3, Supporting Information S1 for the analytical solution). The non-obvious behaviors of these quantities are shown in Figures 2e–2g. The average migration rate $\langle |V| \rangle$ is not a monotonously increasing function of the flow, but it has a maximum at low-medium depth values that becomes more evident at higher sinuosities. That is, the greater discharges can give rise to high local values of migration (see peaks in Figure 2d), but they are not responsible for the greater global planimetric movements along the entire meander. This counter-intuitive result is confirmed by looking at the relation between the meander length change and the flow depth for different sinuosities, $\dot{L} = \dot{L}(H, S)$ (Figure 2f). $\dot{L}$ increases with the sinuosity but depends on the water stage to a great extent. $\dot{L}$ is higher for low flows and becomes negative for high flows when the spatial distribution of the local migration velocity, V , is such that the meander tends to straighten back. In other words—before imposing their typical wavelength—high discharges have a straightening effect on the pre-existing plan (i.e., harmonic damping).

To clarify whether the acceleration of low flows or the dampening of higher flows is stronger in the nonlinear meander dynamics, we integrate $\dot{L}$ over the range of flow depths and compare it to the $\dot{L}$ obtained for a fixed, average flow—basically extending the linear stability analysis for σ (Figure 2a) to the finite-amplitude meanders. The results (Figure 2g) show an interesting regime shift as a function of the meander sinuosity. A meander with a low sinuosity evolves slower with variable flows, as expected from the linear analysis results. By contrast, a well-developed meander with a high sinuosity evolves faster with variable flows, meaning that the acceleration induced by low flows prevails over the dampening of the high flows. The location of the regime transition (namely the intersection between the two curves in Figure 2g) depends on the combination of hydrological and morphological parameters such as the PDF of H and the meander geometry, suggesting that location-specific analyses are necessary to assess the impact of flow variability on well-developed meanders.

4. Discussion and Conclusions

The comparison between the short-term evolution of meandering rivers under variable and constant flows has yielded several unexpected and counter-intuitive results. As often happens with nonlinear natural systems, the presence of noise leads to nontrivial phenomena. In this study, the noise is represented by the varying discharges, which play quite a surprising and unforeseen role in highly nonlinear complexities like meandering rivers. The most unpredictable effects are summarized here. Firstly, flow variability slows down both the formation and the evolution of meanders, resulting in a reduced sinuosity and average growth rate than the case under constant flow. In addition, the reach elongation induced by the local bank erosion is delayed, and such delay increases with time as the evolution proceeds. Finally, the meander length and the mean migration velocity decrease with high flow values.

In this context, it is worth discussing these outcomes in light of several implications upon the common knowledge of rivers, their management and flow regulation. Our analyses suggest that meandering rivers can experience a

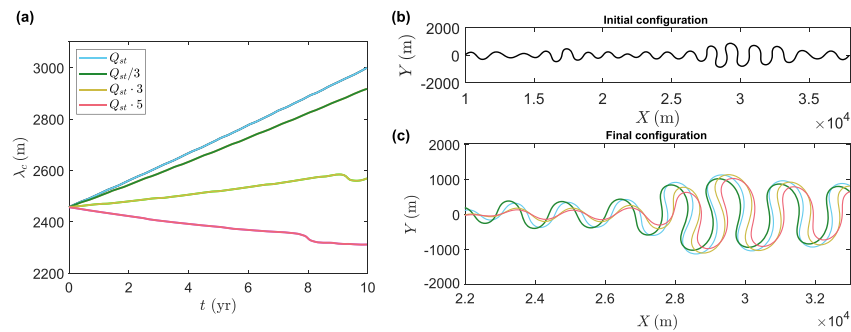


Figure 3. Evolution of a given river meander geometry for different flow values. (a) Evolution of the river-averaged curvilinear wavelength λ_c for the 4 cases reported in the legend ($Q_{st} = 500 \text{ m}^3$). (b) Initial planimetric configuration of the 4 simulations, that is, at time $t = 0$ years. (c) Zoom of the final configurations (at time $t = 10$ years); the color codes are the same as panel (a).

straightening process in the case of high flow to eventually set a different harmonic wave. A remarkable practical consequence is that a variation in the flow regime due to natural effects (e.g., climate-change induced droughts) or anthropogenic disturbance (e.g., dam regulation) can impact the existing meander wavelength. This aspect is further confirmed and investigated by numerical simulations shown in Figure 3. Starting from an already well-developed planimetry where the typical linear wavelength has already been selected, we investigate the impact of a sudden flow change on the meander curvilinear wavelength. Both lower and higher values of the flow (colored curves in Figure 3a) lead to a substantial reduction in the growth rate of the meander compared to the steady flow that generated the initial planform (black curve in Figure 3b). Moreover, if the discharge is particularly high (pink line in Figure 3), the river experiences a straightening and a reduction in the meander curvilinear length. This arguably counter-intuitive result demonstrates that an increase in the flow rate does not necessarily cause an increase in sinuosity.

Another crucial issue regards the actual dominant (or ‘formative’) discharge to be considered for meandering rivers. Our outcomes suggest that two formative flows are needed to characterize the meander dynamics: one for the meander wavelength selection (i.e., the average water flow), and one that determines the evolution timescale, which is not coincident with the mean flow. This can be verified by comparing the evolution of sinuosity for: (a) a constant steady discharge Q_{st} ; (b) the equivalent variable flow Q_{unst} with mean equal to the steady case and degree of unsteadiness set to $Cv = 0.75$; and (c) a constant steady discharge slightly higher than Q_{st} . We observe that there is a steady flow (case (c) in this example) providing a temporal evolution of the sinuosity very close to the unsteady case (Figure S2, Supporting Information S1). Particularly, the value of the constant discharge that should be set in order to describe, as closely as possible, the timing of the meandering dynamics in the unsteady case is actually higher than the mean of the varying flow. This implies that the value adopted in numerical simulations running with a constant discharge should be chosen carefully and that the so-called formative discharge takes on different values depending on which aspect of the meandering dynamics one focuses on.

Along these lines, one wonders whether the choice of the numerical model (and so of the meandering features that it is capable of capturing) may affect such statements. We have therefore verified that the same outcomes emerge with a more advanced model proposed by Zolezzi and Seminara (2001) (Supporting Information S1). Although it takes into account features that are instead neglected in the HIPS model (e.g., secondary currents and sediment transport), the same conclusions are found with both models (Supporting Information S1, Figure S1). This suggests that the slowing down induced by varying flows is not imputable to sediment transport phenomena nor to modeling artifacts, but is a physical feature of the meander dynamics.

A final relevant remark concerns bank erodibility (E). This parameter depends on the history of the planform evolution process, the riparian vegetation, geological constraints, and anthropogenic effects (Seminara, 2006). As such, in this study, we adopted a typical literature value for E , resulting from field campaigns under the assumption of constant discharge (Parker & Andrews, 1986). For example, it was found that the erodibility coefficient mainly depends on bank material properties (C. Constantine et al., 2009) and, therefore, it seems that it can be estimated directly from field data without any assumptions on the controlling conditions, namely the forcing discharge(s). This implies that the choice of E implicitly accounts for an (historical) morphodynamic

evolution, where discharges have naturally varied and shaped the considered planform according to unsteady timescales. Thus, our study may open a debate around the proper steady discharge to be considered when testing in-situ conditions for the calibration of E . Of course, future work is needed to address and verify this hypothesis.

To conclude, we acknowledge that our current modeling approach operates under the assumption of a constant channel width. Although curvature nonlinearly induces width oscillations, and meandering rivers typically exhibit periodic planform sequences (Zolezzi et al., 2012), this assumption remains suitable for capturing discharge variability. Indeed, under varying flow conditions, Asahi et al. (2013) observed an overall equilibrium between bank erosion, leading to channel expansion, and land accretion, resulting in channel narrowing. Consequently, channel width remains nearly constant throughout the studied evolution.

It is important to note that many other factors contributing to river dynamics' complexity and fascination were not addressed in this study. These factors include, for example, temporal variations in river transects due to different flow regimes, interactions with vegetation dynamics, and soil heterogeneity. However, the findings presented here clearly demonstrate that flow fluctuations can induce non-trivial noise-induced phenomena, with significant implications for river engineering and the way rivers respond to changes in hydrological forcing.

Data Availability Statement

The Matlab code for the numerical simulations is available at Bassani and Camporeale (2024).

Acknowledgments

This study was carried out within the E-capture project and Sedmornet project—funded by the European Union—Next Generation EU within the PRIN 2022 program (D.D. 104 – 02/02/2022 Ministero dell'Università e della Ricerca). This manuscript reflects only the authors' views and opinions and the Ministry cannot be considered responsible for them. Computing resources for the simulations were provided by hpc@polito, an Academic Computing project of the Department of Control and Computer Engineering at the Polytechnic University of Turin (<http://www.hpc.polito.it>). Open access publishing facilitated by Politecnico di Torino, as part of the Wiley - CRUI-CARE agreement.

References

- Asahi, K., Shimizu, Y., Nelson, J., & Parker, G. (2013). Numerical simulation of river meandering with self-evolving banks. *Journal of Geophysical Research: Earth Surface*, 118(4), 2208–2229. <https://doi.org/10.1002/jgrf.20150>
- Bassani, F., & Camporeale, C. (2024). Camporeale_Bassani_MEANDER-CODE-v1.0.0 [Software]. Zenodo. Retrieved from <https://doi.org/10.5281/zenodo.11639091>
- Bertagni, M. B., Perona, P., & Camporeale, C. (2018). Parametric transitions between bare and vegetated states in water-driven patterns. *Proceedings of the National Academy of Sciences*, 115(32), 8125–8130. <https://doi.org/10.1073/pnas.1721765115>
- Buijse, A. D., Coops, H., Staras, M., Jans, L., Van Geest, G., Grift, R., et al. (2002). Restoration strategies for river floodplains along large lowland rivers in Europe. *Freshwater Biology*, 47(4), 889–907. <https://doi.org/10.1046/j.1365-2427.2002.00915.x>
- Camporeale, C., Perona, P., Porporato, A., & Ridolfi, L. (2005). On the long-term behavior of meandering rivers. *Water Resources Research*, 41(12). <https://doi.org/10.1029/2005wr004109>
- Camporeale, C., Perona, P., Porporato, A., & Ridolfi, L. (2007). Hierarchy of models for meandering rivers and related morphodynamic processes. *Reviews of Geophysics*, 45(1). <https://doi.org/10.1029/2005rg000185>
- Camporeale, C., Perucca, E., & Ridolfi, L. (2008). Significance of cutoff in meandering river dynamics. *Journal of Geophysical Research*, 113(F1). <https://doi.org/10.1029/2006jf000694>
- Carlin, M., Redolfi, M., & Tubino, M. (2021). The long-term response of alternate bars to the hydrological regime. *Water Resources Research*, 57(7), e2020WR029314. <https://doi.org/10.1029/2020wr029314>
- Ciotti, D. C., McKee, J., Pope, K. L., Kondolf, G. M., & Pollock, M. M. (2021). Design criteria for process-based restoration of fluvial systems. *BioScience*, 71(8), 831–845. <https://doi.org/10.1093/biosci/biab065>
- Constantine, C., Dunne, T., & Hanson, G. J. (2009). Examining the physical meaning of the bank erosion coefficient used in meander migration modeling. *Geomorphology*, 106(3–4), 242–252. <https://doi.org/10.1016/j.geomorph.2008.11.002>
- Constantine, J. A., Dunne, T., Ahmed, J., Legleiter, C., & Lazarus, E. D. (2014). Sediment supply as a driver of river meandering and floodplain evolution in the Amazon Basin. *Nature Geoscience*, 7(12), 899–903. <https://doi.org/10.1038/ngeo2282>
- Duan, J. G., & Julien, P. Y. (2005). Numerical simulation of the inception of channel meandering. *Earth Surface Processes and Landforms: The Journal of the British Geomorphological Research Group*, 30(9), 1093–1110. <https://doi.org/10.1002/esp.1264>
- Eccles, R., Zhang, H., & Hamilton, D. (2019). A review of the effects of climate change on riverine flooding in subtropical and tropical regions. *Journal of Water and Climate Change*, 10(4), 687–707. <https://doi.org/10.2166/wcc.2019.175>
- Edwards, B. F., & Smith, D. H. (2002). River meandering dynamics. *Physical Review E*, 65(4), 046303. <https://doi.org/10.1103/physreve.65.046303>
- Eekhout, J., Houtink, A., & Mosselman, E. (2013). Field experiment on alternate bar development in a straight sand-bed stream. *Water Resources Research*, 49(12), 8357–8369. <https://doi.org/10.1002/2013wr014259>
- Eke, E., Parker, G., & Shimizu, Y. (2014). Numerical modeling of erosional and depositional bank processes in migrating river bends with self-formed width: Morphodynamics of bar push and bank pull. *Journal of Geophysical Research: Earth Surface*, 119(7), 1455–1483. <https://doi.org/10.1002/2013jgrf003020>
- François, B., Schlef, K., Wi, S., & Brown, C. (2019). Design considerations for riverine floods in a changing climate—a review. *Journal of Hydrology*, 574, 557–573. <https://doi.org/10.1016/j.jhydrol.2019.04.068>
- Gautier, E., Brunstein, D., Vauchel, P., Roulet, M., Fuertes, O., Guyot, J.-L., et al. (2007). Temporal relations between meander deformation, water discharge and sediment fluxes in the floodplain of the Rio Beni (Bolivian Amazonia). *Earth Surface Processes and Landforms*, 32(2), 230–248. <https://doi.org/10.1002/esp.1394>
- Gilvear, D. J. (1999). Fluvial geomorphology and river engineering: Future roles utilizing a fluvial hydrosystems framework. *Geomorphology*, 31(1–4), 229–245. [https://doi.org/10.1016/s0169-555x\(99\)00086-0](https://doi.org/10.1016/s0169-555x(99)00086-0)
- Guo, X., Chen, D., & Parker, G. (2019). Flow directionality of pristine meandering rivers is embedded in the skewing of high-amplitude bends and neck cutoffs. *Proceedings of the National Academy of Sciences*, 116(47), 23448–23454. <https://doi.org/10.1073/pnas.1910874116>
- Hall, P. (2004). Alternating bar instabilities in unsteady channel flows over erodible beds. *Journal of Fluid Mechanics*, 499, 49–73. <https://doi.org/10.1017/s0022112003006219>

- Hasegawa, K. (1977). Computer simulation of the gradual migration of meandering channels. In *Proceedings of the hokkaido branch* (pp. 197–202). Japan Society of Civil Engineering.
- Howard, A. D., & Hemberger, A. T. (1991). Multivariate characterization of meandering. *Geomorphology*, 4(3–4), 161–186. [https://doi.org/10.1016/0169-555x\(91\)90002-r](https://doi.org/10.1016/0169-555x(91)90002-r)
- Ikeda, S., Parker, G., & Sawai, K. (1981). Bend theory of river meanders. Part 1. Linear development. *Journal of Fluid Mechanics*, 112(-1), 363–377. <https://doi.org/10.1017/s0022112081000451>
- Imran, J., Parker, G., & Pirmez, C. (1999). A nonlinear model of flow in meandering submarine and subaerial channels. *Journal of Fluid Mechanics*, 400, 295–331. <https://doi.org/10.1017/s0022112099006515>
- Inglis, C. C. (1949). *The behavior and control of rivers and canals*. Research Publication No. 13 Central Water Power.
- Jansen, P., Van Bendegom, L., Van Den Berg, J., De Vries, M., & Zanen, A. (1979). *Principles of River Engineering: The non-tidal alluvial river*. Pitman.
- Johannesson, H., & Parker, G. (1989). Linear theory of river meanders. *River Meandering*, 12, 181–213. <https://doi.org/10.1029/wm012p0181>
- Ollerio, A. (2010). Channel changes and floodplain management in the meandering middle Ebro River, Spain. *Geomorphology*, 117(3–4), 247–260. <https://doi.org/10.1016/j.geomorph.2009.01.015>
- Paola, C., Heller, P. L., & Angevine, C. L. (1992). The large-scale dynamics of grain-size variation in alluvial basins, 1: Theory. *Basin Research*, 4(2), 73–90. <https://doi.org/10.1111/j.1365-2117.1992.tb00145.x>
- Parker, G., & Andrews, E. D. (1986). On the time development of meander bends. *Journal of Fluid Mechanics*, 162(-1), 139–156. <https://doi.org/10.1017/s0022112086001970>
- Parker, G., Paola, C., Whipple, K. X., & Mohrig, D. (1998). Alluvial fans formed by channelized fluvial and sheet flow. I: Theory. *Journal of Hydraulic Engineering*, 124(10), 985–995. [https://doi.org/10.1061/\(asce\)0733-9429\(1998\)124:10\(985\)](https://doi.org/10.1061/(asce)0733-9429(1998)124:10(985))
- Parker, G., Shimizu, Y., Wilkerson, G., Eke, E. C., Abad, J. D., Lauer, J., et al. (2011). A new framework for modeling the migration of meandering rivers. *Earth Surface Processes and Landforms*, 36(1), 70–86. <https://doi.org/10.1002/esp.2113>
- Parker, G., Wilcock, P. R., Paola, C., Dietrich, W. E., & Pitlick, J. (2007). Physical basis for quasi-universal relations describing bankfull hydraulic geometry of single-thread gravel bed rivers. *Journal of Geophysical Research*, 112(F4). <https://doi.org/10.1029/2006jf000549>
- Perucca, E., Camporeale, C., & Ridolfi, L. (2005). Nonlinear analysis of the geometry of meandering rivers. *Geophysical Research Letters*, 32(3). <https://doi.org/10.1029/2004gl021966>
- Pittaluga, M. B., & Seminara, G. (2011). Nonlinearity and unsteadiness in river meandering: A review of progress in theory and modelling. *Earth Surface Processes and Landforms*, 36(1), 20–38. <https://doi.org/10.1002/esp.2089>
- Ridolfi, L., D'Odorico, P., & Laio, F. (2011). *Noise-induced phenomena in the environmental sciences*. Cambridge University Press.
- Seminara, G. (2006). Meanders. *Journal of Fluid Mechanics*, 554(-1), 271–297. <https://doi.org/10.1017/s0022112006008925>
- Seminara, G., Tambroni, N., & Lanzoni, S. (2024). *Theoretical morphodynamics: River meandering*. Firenze University Press.
- Tubino, M. (1991). Growth of alternate bars in unsteady flow. *Water Resources Research*, 27(1), 37–52. <https://doi.org/10.1029/90wr01699>
- Vesipa, R., Camporeale, C., & Ridolfi, L. (2017). Effect of river flow fluctuations on riparian vegetation dynamics: Processes and models. *Advances in Water Resources*, 110, 29–50. <https://doi.org/10.1016/j.advwatres.2017.09.028>
- Welford, M. R. (1994). A field test of Tubino's (1991) model of alternate bar formation. *Earth Surface Processes and Landforms*, 19(4), 287–297. <https://doi.org/10.1002/esp.3290190402>
- Zolezzi, G., Luchi, R., & Tubino, M. (2009). Morphodynamic regime of gravel bed, single-thread meandering rivers. *Journal of Geophysical Research*, 114(F1). <https://doi.org/10.1029/2007jf000968>
- Zolezzi, G., Luchi, R., & Tubino, M. (2012). Modeling morphodynamic processes in meandering rivers with spatial width variations. *Reviews of Geophysics*, 50(4). <https://doi.org/10.1029/2012rg000392>
- Zolezzi, G., & Seminara, G. (2001). Downstream and upstream influence in river meandering. Part 1. General theory and application to over-deepening. *Journal of Fluid Mechanics*, 438(13), 183–211. <https://doi.org/10.1017/s002211200100427x>

Supporting Information for “Unexpected transient dynamics of meandering rivers with unsteady flows”

Francesca Bassani^{1,2}, Matteo B. Bertagni^{2,3,4}, Luca Ridolfi², and Carlo
Camporeale²

¹Laboratory of Catchment Hydrology and Geomorphology, École Polytechnique Fédérale de Lausanne, Sion, Switzerland

²Department of Environment, Land and Infrastructure Engineering, Politecnico di Torino, Torino, Italy

³The High Meadows Environmental Institute, Princeton University, Princeton, NJ, USA

⁴Department of Civil and Environmental Engineering, Princeton University, Princeton, NJ, USA

Contents of this file

1. Text S1 to S3
2. References
3. Table S1
4. Figures S1 to S2

Introduction Details about the numerical and theoretical models are presented in this Supporting Information. **Text S1** provides information about the basic equations used in the numerical models of (i) Hasegawa (1977); Ikeda, Parker, and Sawai (1981) – (HIPS

model) and (ii) Zolezzi and Seminara (2001) – (ZS model). **Text S2** reports the hydraulic geometry equations used to define the parameters of the simulated rives. **Text S3** presents details of the linear and non-linear analyses. **Table S1** lists the morphodynamic parameters adopted in the simulations. **Figure S1** shows the linear analysis of the ZS model. **Figure S2** compares the temporal evolution of sinuosity for three different discharges.

Text S1. The HIPS and ZS models

The planimetric evolution of meandering rivers is given by the continuous enlargement of meander bends, which can migrate downstream or upstream. To study these dynamics, it is sufficient to focus on the river axis described by the coordinates (s, n) under the assumption that the channel width remains constant during the migration. Geomorphological evidence supports this since the erosion occurring at the outer bank is balanced by the deposit at the inner side (Camporeale et al., 2008). The plane curve parameterized by the vector $\mathbf{r}(s, t)$ evolves in time t and space (along the curvilinear coordinate s) according to:

$$\frac{d\mathbf{r}}{dt} = \mathbf{n}V - \frac{\partial \mathbf{r}}{\partial s} \int_0^s CV ds' \quad (1)$$

where $\mathbf{n}$ is the normal versor and C is the curvature. Hasegawa (1977) and Ikeda et al. (1981) suggested a linear relationship for the local normal velocity, namely, $V = E \cdot u_b$, with E an erodibility coefficient characterizing the geotechnical properties of the bank and u_b the excess bank velocity, i.e., the value of the depth-averaged flow velocity computed at the edge of the lateral boundary, close to the bank. In fact, in meandering rivers curvature generates secondary flows, which are spiral-like currents that move across the cross-section

of the river. These secondary flows transport momentum from the high-velocity outer bank toward the inner bank, redistributing the flow but still leaving a velocity gradient from outer to inner bank (see Camporeale, Perona, Porporato, and Ridolfi (2007) for a detailed overview of the mechanisms).

Various linear meandering models were developed to derive u_b on the basis of different approximations of the morphodynamic processes (Ikeda et al., 1981; Johannesson & Parker, 1989; Zolezzi & Seminara, 2001). All these models are based on the following fundamental assumptions. i) The sediment on the riverbed is assumed to be cohesionless, with a uniformly distributed grain diameter. ii) Given that the typical vertical scale (i.e., water depth) is much smaller than the characteristic horizontal scale (i.e., river half-width), the vertical velocity component is neglected, and the hydrostatic pressure distribution is applied in the vertical direction. iii) Both the flow and bed topography are assumed to adjust instantaneously to the planform, treating the process as quasi-stationary. These hypotheses supports Exner's equation for bed sediment, and the use of the shallow-water equations which, thanks to point (iii), are made to be time independent.

The model by Zolezzi and Seminara (2001) provides the most complete linear solution of shallow water equations in curvilinear coordinates (respectively the longitudinal s and the spanwise n), under the assumption of a constant width (but see a further improvement introduced by Zolezzi, Luchi, and Tubino (2012)) and in terms of the lateral Fourier decomposition of the longitudinal flow field perturbation $u(s, n) = \sum_{m=0, \infty} u_m(s) \sin(Mn)$ (being $M = \frac{1}{2}(2m+1)\pi$). For a longitudinally unbounded domain, the generic m th mode of the Fourier decomposition $u_m(s)$, is described by a *fourth-order* ordinary differential

equation ODE. Once resolved, u is computed at the bank (i.e., $n=1$ in the dimensionless framework), thus obtaining the so-called excess bank velocity u_b .

An intermediate model by Johannesson and Parker (1989), can be obtained if one assumes: i) negligible coupling between curvature-driven secondary currents and topography; ii) no spatial variations in the friction coefficient and no dependence of the bedload transport on the flow depth; and iii) vertically averaged value of the eddy viscosity. With these assumptions, the morphodynamic model reduces to a *second-order* ODE for $u_m(s)$. Similarly, if the coupling between the sediment dynamics and fluid dynamics is also neglected, and the bed topography only depends on the local curvature, the HIPS model, proposed by Hasegawa (1977) and Ikeda et al. (1981), is obtained.

The HIPS is the simplest wherein a simplified relationship for the bed elevation replaces the Exner equation. Specifically, the perturbation of bed topography with respect to the uniform flow condition is assumed to be linearly sloped in the spanwise direction, with a slope proportional to the local curvature, being the so called slope factor A the coefficient of proportionality. Here, following the Johannesson and Parker (1989) formulation, the slope factor is computed as

$$A = \frac{1}{0.005929 \cdot (0.55/\sqrt{\tau_0})} \cdot \frac{2}{45} \cdot \frac{\chi + (2/7)}{\chi + (1/3)} - 1, \quad (2)$$

with τ_0 the Shields' stress, C_f the friction coefficient, and $\chi = \frac{0.077}{\sqrt{C_f}} - \frac{1}{3}$. Furthermore, in the HIPS model the transversal momentum balance is derived by the Euler equation, and no spatial change in friction coefficient and bed load transport are considered. For further details, see again Camporeale et al. (2007).

The latter simplifications yield a single *first-order* ODE for the river dynamics:

$$\frac{\partial u_b}{\partial s} + \frac{u_b}{D} = bU \left(\frac{\partial^2 \theta}{\partial s^2} - \frac{\mathcal{P}}{D} \frac{\partial \theta}{\partial s} \right), \quad (3)$$

where $\mathcal{P} = (F^2 + A)/2$ is Parker's number for sediment dynamics (which can be considered a constant when neglecting the weak dependence to the Froude number $F = U/\sqrt{gH}$ (Parker & Andrews, 1986; Edwards & Smith, 2002)); θ is the angle between the river direction s and the Cartesian coordinate x ; and $D = H/(2C_f)$ and $T = D^2/(bEU)$ are the sinuosity-dependent length and time scales that govern the meandering dynamics. These include the stream velocity U and depth H , which correspond to the cross-averaged quantities if a constant discharge is considered, otherwise, they vary following the flow unsteadiness.

It is important to remark that we adopted the HIPS model because its simplicity allowed us the analytical treatment of the nonlinear evolution, but the results obtained from the numerical simulations were all confirmed with the model by Zolezzi and Seminara (2001), where all the approximations enclosed in HIPS are instead relaxed. A detailed comparison between the two models can be found in Camporeale et al. (2007).

Text S2. Hydraulic geometry formulas for the simulated rivers

Following Parker, Wilcock, Paola, Dietrich, and Pitlick (2007), the empirical equations adopted to define single-thread gravel bed rivers' dimensional bankfull width B_{bf} , depth

H_{bf} , and slope J_{bf} read:

$$B_{bf} = 4.63 \cdot \frac{Q_{bf}^{0.4}}{g^{1/5}} \cdot \left(\frac{Q_{bf}}{\sqrt{g d_{50}^5}} \right)^{0.0667} \quad (4)$$

$$H_{bf} = 0.382 \cdot \frac{Q_{bf}^{0.4}}{g^{1/5}} \quad (5)$$

$$J_{bf} = 0.101 \cdot \left(\frac{Q_{bf}}{\sqrt{g d_{50}^5}} \right)^{0.0667} \quad (6)$$

where g is the acceleration of gravity. As a result, it is sufficient to set (i) the bankfull discharge Q_{bf} and (ii) the mean grain size d_{50} to derive the main parameters that realistically characterize the simulated rivers. The above results are based on field campaigns on real rivers at their current stage of evolution, i.e., the subscript $_{bf}$ indicates values at the channel bankfull. In the present work, the bankfull width was further multiplied by a factor assumed equal to 0.6, so that – for the sake of comparison – all simulations (i.e., all cases with steady and unsteady flow of each run) would pertain to the sub-resonant regime, namely channels with dominant downstream influence in the morphodynamics and upstream facing meanders (*sensu*, Zolezzi and Seminara (2001)). Such choice is in line with reality: it was found that evolving meanders almost invariably show a transition from super-resonant to sub-resonant regimes (Zolezzi et al., 2009; Seminara et al., 2024). This is a consequence of the reduction of the channel slope due to meander elongation. The morphodynamic parameters adopted in the three runs are listed in Tab. S1.

When the river sinuosity grows, its flow speed is lowered while its depth increases. The comparison among sinuosities deriving from long-term simulations obtained through various models (Camporeale et al., 2005) and characterized by morphodynamic properties similar to the Amazonian meandering rivers (Constantine et al., 2014), together with rivers analyzed by Guo, Chen, and Parker (2019), shows that the average S of a fully-developed

meandering river ranges approximately from 2.5 to 4-4.5. As such, here we have assumed $S=5$ as the maximum sinuosity that can be attained by developed streams.

Text S3. Linear and non-linear dynamics

By linear stability analysis, it can be shown (Edwards & Smith, 2002) that the HIPS model provides the dimensional growth rate

$$\sigma = \frac{q^2 D_0^2 (\mathcal{P} - D_0^2 q^2)}{T_0 (1 + D_0^2 q^2)}, \quad (7)$$

where $q = 2\pi/\lambda$ is the curvilinear wavenumber. The corresponding fastest-growing wavelength, namely the λ that maximizes the growth rate, is

$$\lambda_s = \frac{\pi H}{C_f} \sqrt{(\mathcal{P} + 1)^{1/2} - 1}. \quad (8)$$

Regarding the non-linear dynamics, the temporal evolution of the meander length (dL/dt , i.e., $\dot{L}$) can be obtained by integrating along the curvilinear coordinate s the product between the migration velocity ($V = E \cdot u_b$) and the river curvature ($\kappa = -\partial\theta/\partial s$) following Edwards and Smith (2002). Using Kinoshita's curve (Parker and Andrews (1986) and eq. (2) in the main manuscript) for the river planar geometry, the resulting analytical solution is:

$$\dot{L} = \int_0^{2\pi/q} \kappa(s') v(s') ds' = \pi E b U q \epsilon^2 \left(\frac{(\mathcal{P} - D^2 q^2)}{D^2 q^2 + 1} + \epsilon^4 \frac{(9\mathcal{P} + 1)(\mathcal{P} - 9D^2 q^2)}{4096(9D^2 q^2 + 1)} \right). \quad (9)$$

Note that the second term in eq. (9) is negligible for a small meander amplitude ϵ .

The coefficients α_i for the solution of the meander migration velocity (eq. (3) in the main text) are

$$\alpha_1 = -64 (\mathcal{P} - D^2 q^2) (1 + 9D^2 q^2), \quad (10)$$

$$\alpha_2 = - \left(\mathcal{P} + 9D\sqrt{\mathcal{P}}(1 + \mathcal{P})q - 9D^2 q^2 \right) (1 + D^2 q^2) \epsilon^2, \quad (11)$$

$$\alpha_3 = -64D(1 + \mathcal{P})q (1 + 9D^2 q^2), \quad (12)$$

$$\alpha_4 = -3 (1 + D^2 q^2) \left(-\mathcal{P}^{3/2} + D(1 + \mathcal{P})q + 9D^2 \sqrt{\mathcal{P}} q^2 \right) \epsilon^2, \quad (13)$$

$$\alpha_5 = \frac{bEqU\epsilon}{64 (1 + 10D^2 q^2 + 9D^4 q^4)}. \quad (14)$$

References

- Camporeale, C., Perona, P., Porporato, A., & Ridolfi, L. (2005). On the long-term behavior of meandering rivers. *Water Resources Research*, *41*(12).
- Camporeale, C., Perona, P., Porporato, A., & Ridolfi, L. (2007). Hierarchy of models for meandering rivers and related morphodynamic processes. *Reviews of Geophysics*, *45*(1).
- Camporeale, C., Perucca, E., & Ridolfi, L. (2008). Significance of cutoff in meandering river dynamics. *Journal of Geophysical Research: Earth Surface*, *113*(F1).
- Constantine, J. A., Dunne, T., Ahmed, J., Legleiter, C., & Lazarus, E. D. (2014). Sediment supply as a driver of river meandering and floodplain evolution in the Amazon Basin. *Nature Geoscience*, *7*(12), 899–903.
- Edwards, B. F., & Smith, D. H. (2002). River meandering dynamics. *Physical Review E*, *65*(4), 046303.
- Guo, X., Chen, D., & Parker, G. (2019). Flow directionality of pristine meandering rivers

- is embedded in the skewing of high-amplitude bends and neck cutoffs. *Proceedings of the National Academy of Sciences*, 116(47), 23448–23454.
- Hasegawa, K. (1977). Computer simulation of the gradual migration of meandering channels. *Proceedings of the Hokkaido Branch, Japan Society of Civil Engineering*, 197–202.
- Ikeda, S., Parker, G., & Sawai, K. (1981). Bend theory of river meanders. Part 1. Linear development. *Journal of Fluid Mechanics*, 112, 363–377.
- Johannesson, H., & Parker, G. (1989). Linear theory of river meanders. *River meandering*, 12, 181–213.
- Parker, G., & Andrews, E. D. (1986). On the time development of meander bends. *Journal of Fluid Mechanics*, 162, 139–156.
- Parker, G., Wilcock, P. R., Paola, C., Dietrich, W. E., & Pitlick, J. (2007). Physical basis for quasi-universal relations describing bankfull hydraulic geometry of single-thread gravel bed rivers. *Journal of Geophysical Research: Earth Surface*, 112(F4).
- Seminara, G., Tambroni, N., & Lanzoni, S. (2024). *Theoretical morphodynamics: river meandering*. Firenze University Press.
- Zolezzi, G., Luchi, R., & Tubino, M. (2009). Morphodynamic regime of gravel bed, single-thread meandering rivers. *Journal of Geophysical Research: Earth Surface*, 114(F1).
- Zolezzi, G., Luchi, R., & Tubino, M. (2012). Modeling morphodynamic processes in meandering rivers with spatial width variations. *Reviews of Geophysics*, 50(4).
- Zolezzi, G., & Seminara, G. (2001). Downstream and upstream influence in river mean-

dering. Part 1. General theory and application to overdeepening. *Journal of Fluid Mechanics*, 438(13), 183–211.

Table S1. Morphodynamic parameters of three simulated gravel-bed rivers. The subscript “*bf*” indicates bankfull quantities, while subscript zero refers to the straightened river. The erodibility coefficient is set to $E=10^{-6}$ in all runs.

	Q_{bf} (m ³ /s)	d_{50} (m)	B_{bf} (m)	C_{f0} (-)	D_0 (m)	T_0 (years)
Run 1	500	0.03	53	0.0048	222	13.5
Run 2	1500	0.03	89	0.0041	413	25
Run 3	3400	0.04	124	0.0041	582	30

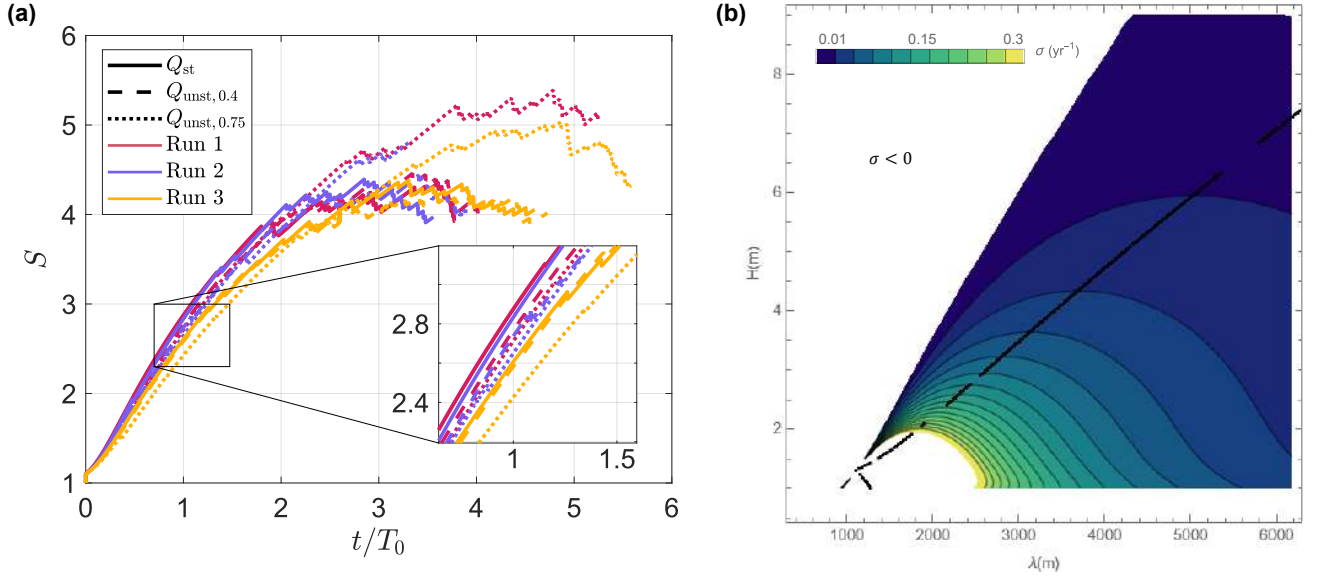


Figure S1. Numerical and theoretical results obtained with the Zolezzi and Seminara (2001) model. (a) Time series of the river sinuosity S . The colors code the three simulated rivers set. The continuous lines indicate the reference simulations forced by a steady discharge Q_{st} ; the simulations with varying discharges (Q_{unst}) characterized by coefficients of variation equal to 0.4 and 0.75 are represented by the dashed and dotted lines, respectively. (b) Linear analysis: contour plot of the linear growth rate σ obtained for the ZS model, as a function of the meander wavelength (λ) and flow depth (H). The black line marks the fastest-growing wavelength for any given water depth.

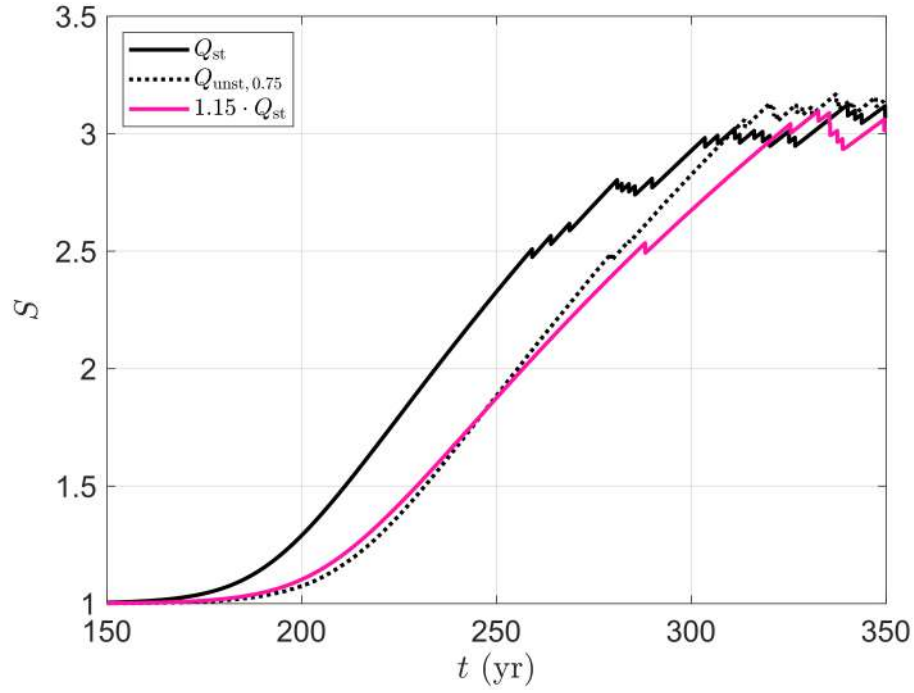


Figure S2. Temporal evolution of the sinuosity S (HIPS model) with: a steady discharge Q_{st} (black continuous line), varying flows Q_{unst} characterized by a coefficient of variation equal to 0.75 (black dotted line), and a steady discharge equal to $1.15 \cdot Q_{st}$ (magenta line), i.e., 15% higher than Q_{st} .